

3.6 High dv/dt Axial lead Polypropylene Film Capacitors

Snubber Capacitors Axial Lead STP-01Q STP-01QE

Applications :

- Protecting Thyristor against transient voltage and current
- high dv/dt and Pulse Current applications
- SMPS Snubbing circuit
- MMC Capacitors / Multi-Mini Capacitors module

Constructions :

- Axial Lead with Epoxy Resin (UL94-V0)sealed at both ends
- tin plated Copper Wire for PCB soldering
- STP-01QE can have Terminals at the Electrical Wire

Electrical Characteristics :

Capacitance : 0.01uF - 4.7uF at 1kHz +25C

Capacitance Tolerance : +/-5%(J), +/-10% (K)

Voltage Range :

600	850	1000	1200	1600	2000	3000
Vdc	Vdc	Vdc	Vdc	Vdc	Vdc	Vdc
275	450	500	500	630	630	750
Vac	Vac	Vac	Vac	Vac	Vac	Vac

Test Voltage : between Terminals :1.6xUn Vdc for 60s +25C

Dissipation Factor : < 0.1% at 1kHz +25C

Rated Temperature : -20C - +85C

Full rated voltage at 85C, derate linearly to 50% rated voltage at 105C.

Service Life : 30,000 hours at rated Vac 70C


60,000 hours at rated Vdc 70C

Accelerated Life :


1.25 x rated DC voltage at 85C for 2,000 hours

Insulation Resistance : >100,000Mohm*uF

at +25C 100Vdc 2minute.

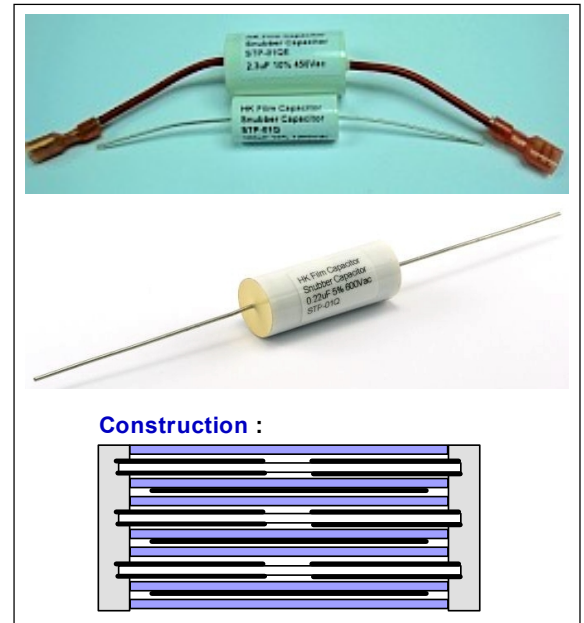

Construction :

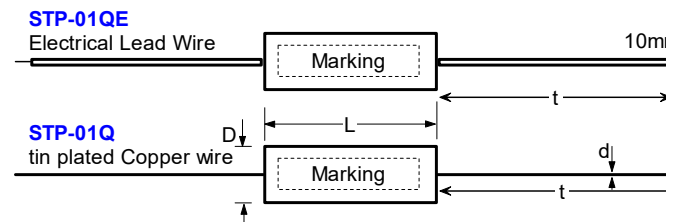

STP-01Q Specifications and Size : 600Vdc / 275Vac

Cn uF	Length Mm	Diameter mm	Copper Wire d mm	ESR mohm	ESL nH	dv/dt v/us	Ipeak 70C	Max. Amp 70C
0.10	34.0	9.0	0.8	28	19	195	19.5	2.0
0.15	34.0	10.5	1.0	13	20	195	29	4.0
0.22	34.0	11.5	1.0	12	20	195	43	4.0
0.33	34.0	13.5	1.0	9	21	195	64	5.0
0.47	34.0	15.5	1.0	7	22	195	91	7.0
0.68	34.0	18.0	1.0	6	23	195	132	8.0
1.00	34.0	21.0	1.0	6	24	195	195	9.0
1.50	34.0	25.0	1.2	5	26	195	293	10.0
2.00	46.0	23.5	1.2	5	31	128	256	11.0
3.30	54.0	27.0	1.2	4	36	105	346	15.0
4.70	54.0	32.5	1.2	4	38	105	490	16.0

STP-01Q Specifications and Size : 850Vdc / 450Vac

Cn uF	Length Mm	Diameter mm	Copper Wire d mm	ESR mohm	ESL nH	dv/dt v/us	Ipeak 70C	Max. Amp 70C
0.15	34.0	13.0	1.0	8	21	710	106	5.0
0.22	34.0	15.5	1.0	8	22	710	156	6.0
0.33	34.0	18.0	1.0	7	23	710	234	7.0
0.47	34.0	21.0	1.0	5	24	710	333	9.0
0.68	34.0	24.5	1.2	4	26	710	483	12.0
1.0	46.0	22.5	1.2	5	30	400	400	11.0
1.5	46.0	27	1.2	4	32	400	600	14.0
2.0	46.0	31	1.2	3	34	400	800	17.0
2.2	46.0	32	1.2	3	34	400	880	18.0
2.5	46.0	34	1.2	3	35	400	1000	19.0

For other Capacitance, Voltage, dv/dt, Peak Current and RMS Current not listed, please contact us for a suggestion.

Headquarter & Production : HK Film Capacitor Ltd <https://www.filmcapacitor-st.com> e-mail : info@filmcapacitor-st.com

Worldwide Sales Office : HKFC Industrial Pty Ltd <https://www.hkfc-industrial.com> e-mail : enquiry@hkfc-industrial.com

STP-01Q Specifications and Size : 1000Vdc / 500Vac

Cn uF	Length Mm	Diameter mm	Copper Wire d mm	ESR mohm	ESL nH	dv/dt v/us	Ipeak 70C	Max. Amp 70C
0.15	34.0	15.0	1.0	7	22	855	128	6.0
0.22	34.0	17.5	1.0	7	23	855	188	7.0
0.33	34.0	21.0	1.0	6	24	855	280	9.0
0.47	34.0	24.0	1.2	5	26	855	400	10.0
0.68	34.0	28.0	1.2	5	27	855	580	11.0
1.0	46.0	26.0	1.2	5	32	480	480	12.0
1.5	46.0	31.0	1.2	4	34	480	720	15.0
2.0	46.0	36.0	1.2	3	36	480	960	19.0

STP-01Q Specifications and Size : 1200Vdc / 500Vac

Cn uF	Length Mm	Diameter mm	Copper Wire d mm	ESR mohm	ESL nH	dv/dt v/us	Ipeak 70C	Max. Amp 70C
0.10	34.0	15.5	1.0	9	22	1140	114	6.0
0.15	34.0	18.5	1.0	7	23	1140	170	7.0
0.22	34.0	22.0	1.0	7	24	1140	250	8.0
0.33	46.0	20.0	1.0	7	29	640	210	9.0
0.47	46.0	23.0	1.2	7	30	640	300	10.0
0.68	46.0	27.0	1.2	6	32	640	435	11.0
1.0	46.0	33.0	1.2	5	35	640	640	14.0
1.5	54.0	35.0	1.2	4	39	500	750	18.0

STP-01Q Specifications and Size : 1600Vdc / 630Vac

Cn uF	Length Mm	Diameter mm	Copper Wire d mm	ESR mohm	ESL nH	dv/dt v/us	Ipeak 70C	Max. Amp 70C
0.10	34.0	18.0	1.0	7	25	1425	140	7.0
0.15	34.0	22.0	1.0	5	24	1425	210	10
0.22	34.0	26.0	1.2	7	26	1425	310	9.0
0.33	46.0	24.0	1.2	7	31	800	260	10.0
0.47	46.0	28.0	1.2	6	32	800	375	11.0
0.68	46.0	33.0	1.2	6	35	800	540	13.0
1.00	46.0	39.0	1.2	5	37	800	800	16.0
1.50	54.0	42.0	1.2	4	42	625	940	20.0
2.00	64.0	43.0	1.2	3	45	470	940	21.0

STP-01Q Specifications and Size : 2000Vdc / 630Vac

Cn uF	Length Mm	Diameter mm	Copper Wire d mm	ESR mohm	ESL nH	dv/dt v/us	Ipeak 70C	Max. Amp 70C
0.022	34.0	12	1.0	35	6	1710	37	2.0
0.033	34.0	14	1.0	20	21	1710	56	3.0
0.047	34.0	15	1.0	12	22	1710	80	5.0
0.068	34.0	18	1.0	8	23	1710	116	6.0
0.10	34.0	21	1.0	7	24	1710	170	8.0
0.15	46.0	20	1.0	7	29	960	141	8.0
0.22	46.0	22	1.0	8	30	960	210	9.0
0.33	46.0	27	1.2	8	32	960	316	10.0
0.47	46.0	32	1.2	6	34	960	451	13.0
0.56	54.0	31	1.2	7	37	754	420	12.0
0.68	54.0	34	1.2	6	39	754	512	14.0
1.00	54.0	41	1.2	5	42	754	750	17.0
1.50	54.0	47	1.2	5	50	754	450	14.0

STP-01Q Specifications and Size : 3000Vdc / 750Vac

Cn uF	Length Mm	Diameter mm	Copper Wire d mm	ESR mohm	ESL nH	dv/dt v/us	Ipeak 70C	Max. Amp 70C
0.01	34.0	12	1.0	60	20	2500	25	2.0
0.015	34.0	14	1.0	40	21	2500	38	2.0
0.022	34.0	16	1.0	25	22	2500	56	3.0
0.033	34.0	18	1.0	14	23	2500	84	5.0
0.047	46.0	17	1.0	14	28	1440	67	5.0
0.068	46.0	19	1.0	12	29	1440	98	6.0
0.10	46.0	23	1.2	10	30	1440	140	8.0
0.15	46.0	27	1.2	8	32	1440	210	10.0

For other Capacitance, Voltage, dv/dt, Peak Current and RMS Current not listed, please contact us for a suggestion.